


# Transportation



## SENERONG F



### Composition

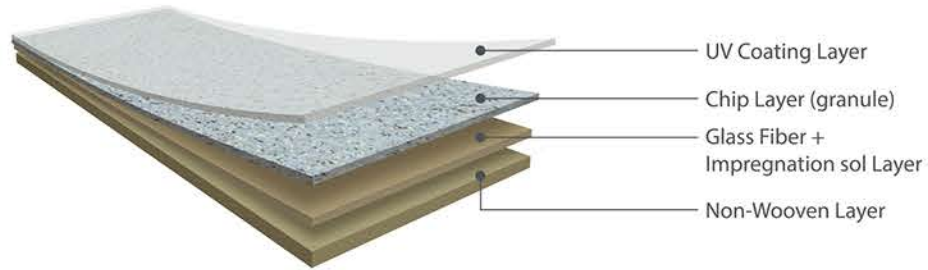

### Description

- Boasts excellent diversity in patterns and durability through the application of special granule color chips.
- Contraction due to heat and moisture is prevented by doubly laminating a special Glass Fiber Layer.
- Able to prevent the spreading of flames through the flooring material in the occurrence of a fire due to outstanding fire-retardancy.
- Appropriate as flooring material for ships as it has acquired certifications for diverse categories of ships.

### Specification


CLASSIFICATION	TOTAL THICKNESS (mm)	WIDTH (mm)	LENGTH (M)
SENERONG F	2.0	1,830	20

### Technical Data

CHARACTERISTIC	STANDARD	UNIT	DATA	
Indentation	KS M 3802	20 °C	mm	Above 0.3
		45 °C	-	Below 1.5
Residual Indentation	KS M 3802	%		Below 25
Dimensional Stability by Heating		%		Below 2.0
Weight Loss on Heating		%		Below 2.5
Contamination Resistance		-		No Defects



RS90021

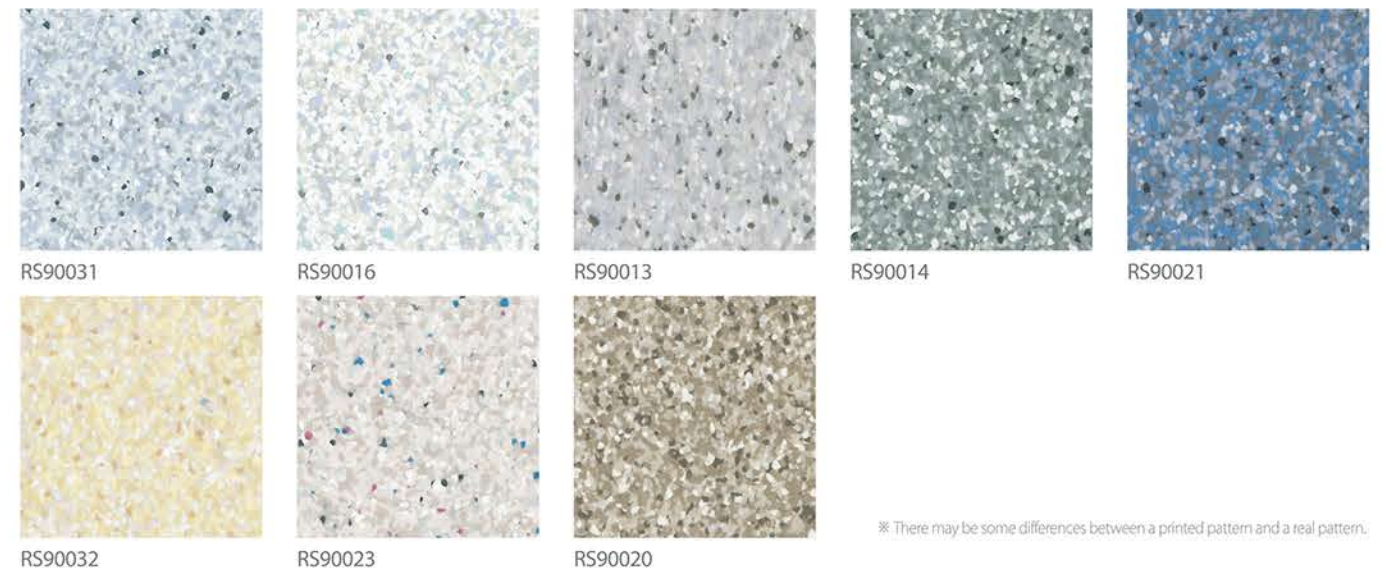

\* There may be some differences between a printed pattern and a real pattern.